

# Льдогенераторы. Серия GB 600. Описание.

По вопросам продаж и поддержки обращайтесь: [bme@nt-rt.ru](mailto:bme@nt-rt.ru) [www.brema.nt-rt.ru](http://www.brema.nt-rt.ru)

Алматы (7273)495-231  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62

Киров (8332)68-02-04  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Липецк (4742)52-20-81  
Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижегород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64

Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Тверь (4822)63-31-35  
Томск (3822)98-41-53  
Тула (4872)74-02-29  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Ярославль (4852)69-52-93

Россия (495)268-04-70


Киргизия (996)312-96-26-47

Казахстан (7172)727-132

# GB 601

## Undercounter ice maker up to 66 kg - Granular system

Hotel  
Restaurant  
Fast food  
Bar  
Disco  
Fish market  
Supermarket  
Medical & SPA  
Industry

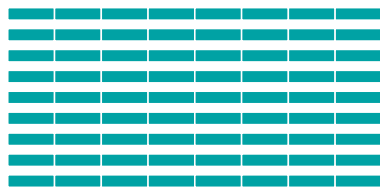

### ► Position n°



### ► Features & Plus

- Granular ice - 80-82% dry
- 1l (water) - 1kg (ice) - only Air cooled
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Removable and cleanable air filter
- AISI 304 SS evaporator
- Air or water cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- Dust-proof water basin
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Automatic water charge
- Standard and special voltages



AISI 304 SS Scotch Brite finish



Removable and cleanable air filter



AISI 304 SS evaporator



Dust-proof water basin



Disappearing insulated door

### ► Prod. 24h

| Air temp. | Water temp. |       | Kg | Lbs |
|-----------|-------------|-------|----|-----|
|           | 10° C       | 50° F |    |     |
| 10° C     | 50° F       | 10° C | 66 | 146 |
| 21° C     | 70° F       | 15° C | 60 | 132 |

**2 Years Warranty**  
subject to limitations

### ► Certifications available for this model



## Undercounter ice maker up to 66 kg - Granular system

### ► Working conditions

- Location: Indoor

|                      | Min           |        | Max           |         |
|----------------------|---------------|--------|---------------|---------|
|                      | 10° C         | 50° F  | 43° C         | 110° F  |
| Ambient temperature  | +10° C        | +50° F | +43° C        | +110° F |
| Water temperature    | +3° C         | +37° F | +32° C        | +90° F  |
| Voltage              | -10%          |        | +10%          |         |
| Water inlet pressure | 1bar (14 psi) |        | 6bar (84 psi) |         |

### ► Performances

|       | Air temperature | Water temperature |       |       |       |       |       |
|-------|-----------------|-------------------|-------|-------|-------|-------|-------|
|       |                 | 10° C             | 50° F | 15° C | 60° F | 21° C | 70° F |
| 10° C | 66 kg           |                   |       |       |       |       |       |
| 50° F | 146 lbs         |                   |       |       |       |       |       |
| 21° C | 60 kg           |                   |       |       |       |       |       |
| 70° F | 132 lbs         |                   |       |       |       |       |       |
| 32° C | 51 kg           |                   |       |       |       |       |       |
| 90° F | 112 lbs         |                   |       |       |       |       |       |

### ► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 106 mm / 4 3/16" - 135 mm / 5 5/16" - 3/4"      ② Water out.: 55 mm / 2 3/16" - 140 mm / 5 8/16" - 24 mm / 15/16"
- ③ Electrical connections: 114 mm / 4 8/16" - 218 mm / 8 9/16"

### ► Technical information

|                        |                                        |                            |                                |
|------------------------|----------------------------------------|----------------------------|--------------------------------|
| Production in 24h      | 60 kg / 132 lbs                        | Water consumption          | A: 1 l/kg - 12,0 gal/100 lbs   |
| Store capacity, up to  | 9 kg / 20 lbs                          |                            | W: 5,3 l/kg - 63,5 gal/100 lbs |
| Cooling system         | A - W                                  | Sizes (L-P-H mm)           | 450 - 620 - 680                |
| Refrigerant            | R404A                                  | (L-P-H in)                 | 17 11/16 - 24 7/16 - 26 12/16  |
| Standard voltage       | 220-240 V ~ 50 Hz                      | Sizes with pack (L-P-H mm) | 505 - 675 - 850                |
| Electrical consumption | 420 W                                  | (L-P-H in)                 | 19 14/16 - 26 9/16 - 33 7/16   |
| Fuse                   | 10 A                                   | Net weight                 | 56 kg / 123 lbs                |
| Finish                 | AISI 304 stainless steel, scotch brite | Gross weight               | 64 kg / 141 lbs                |

All the technical information need to be considered at the following conditions:

Sizes without feet  
Ambient temperature +21° C  
Water temperature +15° C  
Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

**По вопросам продаж и поддержки обращайтесь:** [bme@nt-rt.ru](mailto:bme@nt-rt.ru) [www.brema.nt-rt.ru](http://www.brema.nt-rt.ru)

Алматы (7273)495-231  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62

Киров (8332)68-02-04  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Липецк (4742)52-20-81  
Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64

Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Тверь (4822)63-31-35  
Томск (3822)98-41-53  
Тула (4872)74-02-29  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Ярославль (4852)69-52-93

Россия (495)268-04-70

Киргизия (996)312-96-26-47

Казахстан (7172)727-132