

Льдогенераторы. Серия Muster. Описание.

По вопросам продаж и поддержки обращайтесь: bme@nt-rt.ru www.brema.nt-rt.ru

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62

Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64

Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Россия (495)268-04-70

Киргизия (996)312-96-26-47

Казахстан (7172)727-132

Muster 350

Modular ice maker up to 446 kg - Scale system

[illegible]

► Position n°



► Features & Plus

- Sub-cooled scale ice
- 1l (water) - 1kg (ice) - only Air cooled
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Specific volume $1 \text{ m}^3 = 430 \text{ kg}$ of ice
- Vertical fixed “no leak” evaporator
- AISI 304 SS evaporator
- Cleanable antiscall filter
- Air or water cooling system
- FDA approved - ABS plastic components
- Easy cleanable internal rounded surfaces
- RoHS Free
- Electromechanical operation
- Automatic water charge
- Standard and special voltages
- Frame in INOX



Vertical fixed “no leak”
evaporator



Cleanable antiscale filter



Frame in INOX

► Usable Bins

- Bin 350
- Bin 550V DS
- Double Roller Bin 100

► Prod. 24h


	Air temp.		Water temp.		Kg	Lbs
	10° C	50° F	10° C	50° F	446	983
	21° C	70° F	15° C	60° F	400	882

2 Years Warranty
subject to limitations

► **Certifications available for this model**



Modular ice maker up to 446 kg - Scale system

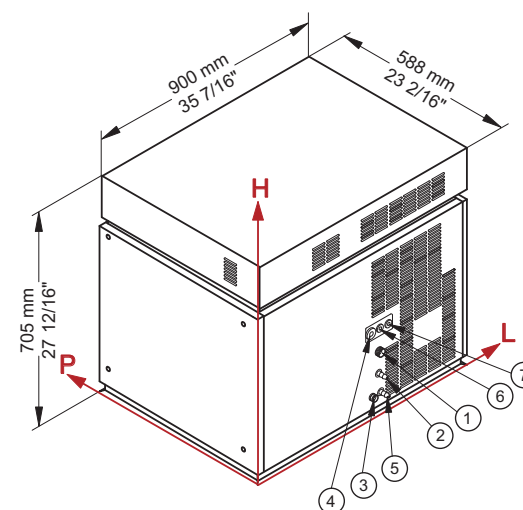

► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

		Water temperature					
		10° C	50° F	15° C	60° F	21° C	70°
Air temperature	10° C	446 kg					
	50° F		983 lbs				
	21° C			400 kg			
	70° F				882 lbs		
	32° C					360 kg	
	90° F						794 lb

► Connections

All measures are referred to the down-left corner (L-H-Ø)

- ① Water in.: 463 mm / 18 4/16" - 187 mm / 7 6/16" - 3/4"
 ② Cond. water in.: 463 mm / 18 4/16" - 120 mm / 4 12/16" - 12 mm / 8/16"
 ③ Water out.: 428 mm / 16 14/16" - 60 mm / 2 6/16" - 24 mm / 15/16"
 ④ Electrical connections: 434 mm / 17 1/16" - 257 mm / 10 2/16"
 ⑤ Cond. water out.: 472 mm / 18 9/16" - 60 mm / 2 6/16" - 12 mm / 8/16"
 ⑥ Remote connections.: 473 mm / 18 10/16" - 257 mm / 10 2/16"
 ⑦ Connection to DRB 500: 510 mm / 20 3/16" - 257 mm / 10 3/16"
 ②③ Only for water cooling systems

► Technical information

Production in 24h	400 kg / 882 lbs
Cooling system	A - W
Refrigerant	R404A
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	2100 W
Fuse	16 A
Water consumption	A: 1 l/kg - 12,0 gal/100 lbs W: 7,5 l/kg - 89,9 gal/100 lbs

Sizes (L-P-H mm)	900 - 588 - 705
(L-P-H in)	35 7/16 - 23 2/16 - 27 12/16
Sizes with pack (L-P-H mm)	965 - 655 - 880
(L-P-H in)	38 - 25 13/16 - 34 10/16
Net weight	137 kg / 302 lbs
Gross weight	152 kg / 335 lbs
Finish	AISI 304 stainless steel, scotch brite

All the technical information need to be considered at the following conditions:
Ambient temperature +21° C
Water temperature +15° C
Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Muster 600

Modular ice maker up to 670 kg - Scale system

[illegible]

► Position n°



► Features & Plus

- Sub-cooled scale ice 99% dry
- 1l (water) - 1kg (ice) - only Air cooled
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Specific volume $1 \text{ m}^3 = 430 \text{ kg of ice}$
- Vertical fixed “no leak” evaporator
- Anticorrosional alloy evaporator
- Removable and cleanable air filter
- Cleanable antiscaling filter
- Air or water cooling system
- FDA approved - ABS plastic components
- Easy cleanable internal rounded surfaces
- RoHS Free
- Electromechanical operation
- Automatic water charge
- Standard and special voltages
- Frame in INOX



Vertical fixed "no leak" evaporator



Removable and cleanable air filter



Cleanable antiscale filter



Frame in INOX

► Usable Bins

- Bin 350
- Bin 550V DS
- Double Roller Bin 100
- Double Roller Bin 500
- Double Roller Bin 1200

► Prod. 24h


	Air temp.		Water temp.		Kg	Lbs
	10° C	50° F	10° C	50° F	670	1477
	21° C	70° F	15° C	60° F	620	1367

2 Years Warranty
subject to limitations

► **Certifications available for this model**



Modular ice maker up to 670 kg - Scale system

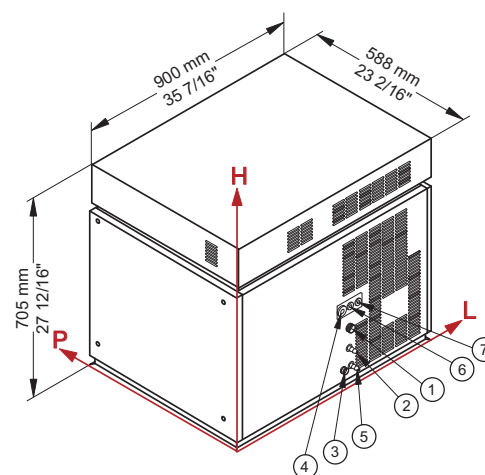

► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

		Water temperature					
		10° C	50° F	15° C	60° F	21° C	70° F
Air temperature	10° C	670 kg					
	50° F		1477 lbs				
	21° C			620 kg			
	70° F				1367 lbs		
	32° C					520 kg	
	90° F						1146 lb

► Connections

All measures are referred to the down-left corner (L-H-Ø)

- ① Water in.: 463 mm / 18 4/16" - 187 mm / 7 6/16" - 3/4"
 ② Cond. water in.: 463 mm / 18 4/16" - 120 mm / 4 12/16" - 12 mm / 8/16"
 ③ Water out.: 428 mm / 16 14/16" - 60 mm / 2 6/16" - 24 mm / 15/16"
 ④ Electrical connections: 434 mm / 17 1/16" - 257 mm / 10 2/16"
 ⑤ Cond. water out.: 472 mm / 18 9/16" - 60 mm / 2 6/16" - 12 mm / 8/16"
 ⑥ Remote connections.: 473 mm / 18 10/16" - 257 mm / 10 2/16"
 ⑦ Connection to DRB 500: 510 mm / 20 3/16" - 257 mm / 10 3/16"
 ②③ Only for water cooling systems

► Technical information

Production in 24h	620 kg / 1367 lbs
Cooling system	A - W
Refrigerant	R404A
Standard voltage	400-415 V ~ 3N 50 Hz
Electrical consumption	3000 W
Fuse	16 A
Water consumption	A: 1 l/kg - 12,0 gal/100 lbs W: 7,4 l/kg - 88,7 gal/100 lbs

Sizes (L-P-H mm)	900 - 588 - 705
(L-P-H in)	35 7/16 - 23 2/16 - 27 12/16
Sizes with pack (L-P-H mm)	965 - 655 - 880
(L-P-H in)	38 - 25 13/16 - 34 10/16
Net weight	151 kg / 333 lbs
Gross weight	166 kg / 366 lbs
Finish	AISI 304 stainless steel, scotch brite

All the technical information need to be considered at the following conditions:
Ambient temperature +21° C
Water temperature +15° C
Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Muster 800

Modular ice maker up to 915 kg - Scale system

[illegible]

► Position n°



► Features & Plus

- Sub-cooled scale ice 99% dry
- 1l (water) - 1kg (ice) - only Air cooled
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Specific volume 1 m³ = 430 kg of ice
- Vertical fixed “no leak” evaporator
- AISI 304 SS evaporator
- Removable and cleanable air filter
- Cleanable antiscall filter
- Air or water cooling system
- FDA approved - ABS plastic components
- Easy cleanable internal rounded surfaces
- RoHS Free
- Electromechanical operation
- Automatic water charge
- Standard and special voltages
- Frame in INOX



Vertical fixed "no leak" evaporator



Removable and cleanable air filter



Cleanable antiscale filter



Frame in INOX

► Usable Bins

- Bin 350
- Bin 550V DS
- Double Roller Bin 100
- Double Roller Bin 500

► Prod. 24h


	Air temp.		Water temp.		Kg	Lbs
	10° C	50° F	10° C	50° F	915	2017
	21° C	70° F	15° C	60° F	900	1984

2 Years Warranty
subject to limitations

► **Certifications available for this model**



Modular ice maker up to 915 kg - Scale system

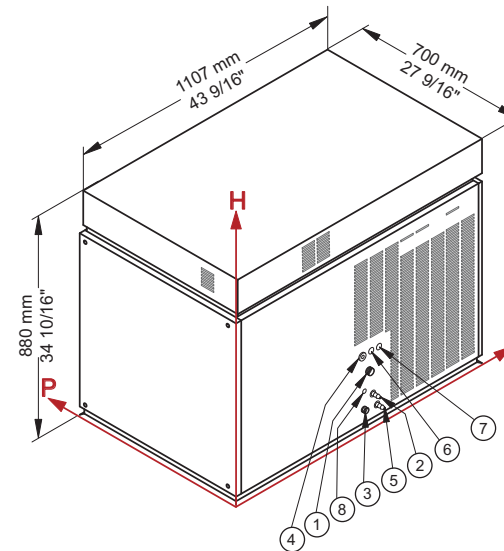

► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

		Water temperature					
		10° C	50° F	15° C	60° F	21° C	70° F
Air temperature	10° C	915 kg					
	50° F		2017 lbs				
	21° C			900 kg			
	70° F				1984 lbs		
	32° C					790 kg	
	90° F						1742 lbs

► Connections

All measures are referred to the down-left corner (L-H-Ø)

- | | |
|---|--|
| ① Water in.: 563 mm / 22 3/16" - 192 mm / 7 9/16" - 3/4" | ② Cond. water in.: 563 mm / 22 3/16" - 125 mm / 4 15/16" - 12 mm / 8/16" |
| ③ Water out.: 528 mm / 20 13/16" - 65 mm / 2 9/16" - 24 mm / 15/16" | ④ Electrical connections: 532 mm / 20 15/16" - 262 mm / 10 5/16" |
| ⑤ Cond. water out.: 573 mm / 22 9/16" - 65 mm / 2 6/16" - 12 mm / 8/16" | ⑥ Remote connections.: 574 mm / 22 10/16" - 262 mm / 10 5/16" |
| ⑦ Connection to DRB 500: 608 mm / 24 15/16" - 262 mm / 10 5/16" | ⑧ Connection to feed pump: 515 mm / 20 5/16" - 159 mm / 10 5/16" |
| ② ③ Only for water cooling systems | |

► Technical information

Production in 24h	900 kg / 1984 lbs
Cooling system	A - W
Refrigerant	R404A
Standard voltage	400-415 V ~ 3N 50 Hz
Electrical consumption	4600 W
Fuse	16 A
Water consumption	A: 1 l/kg - 12,0 gal/100 lbs W: 6,9 l/kg - 82,7 gal/100 lbs

Sizes (L-P-H mm)	1107 - 700 - 880
(L-P-H in)	43 9/16 - 27 9/16 - 34 10/16
Sizes with pack (L-P-H mm)	1210 - 800 - 1095
(L-P-H in)	47 10/16 - 31 8/16 - 43 2/16
Net weight	241 kg / 531 lbs
Gross weight	262 kg / 578 lbs
Finish	AISI 304 stainless steel, scotch brite

All the technical information need to be considered at the following conditions:
 Ambient temperature +21° C
 Water temperature +15° C
 Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Muster 1500

Modular ice maker up to 1560 kg - Scale system

[illegible]

► Position n°



► Features & Plus

- Sub-cooled scale ice 99% dry
- 1l (water) - 1kg (ice) - only Air cooled
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Specific volume 1 m³ = 430 kg of ice
- Vertical fixed “no leak” evaporator
- Anticorodal alloy evaporator
- Removable and cleanable air filter
- Cleanable antiscalse filter
- Air or water cooling system
- FDA approved - ABS plastic components
- Easy cleanable internal rounded surfaces
- RoHS Free
- Electromechanical operation
- Automatic water charge
- Standard and special voltages
- Frame in INOX



Vertical fixed “no leak” evaporator



Removable and cleanable air filter



Cleanable antiscale filter



Frame in INOX

► Usable Bins

- Bin 550V DS
- Double Roller Bin 500
- Double Roller Bin 1200

► Prod. 24h


	Air temp.		Water temp.		Kg	Lbs
	10° C	50° F	10° C	50° F	1560	3439
	21° C	70° F	15° C	60° F	1500	3307

2 Years Warranty
subject to limitations

► **Certifications available for this model**



Modular ice maker up to 1560 kg - Scale system

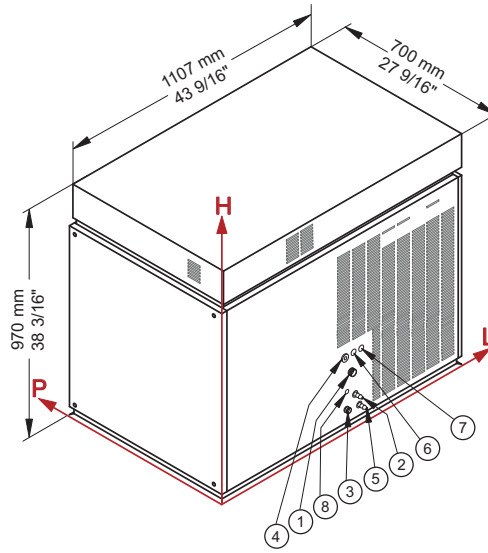

► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

		Water temperature					
		10° C	50° F	15° C	60° F	21° C	70° F
Air temperature	10° C	1560 kg					
	50° F		3439 lbs				
	21° C			1500 kg			
	70° F				3307 lbs		
	32° C					1200 kg	
	90° F						2646 lbs

► Connections

All measures are referred to the down-left corner (L-H-Ø)

- | | |
|---|--|
| ① Water in.: 563 mm / 22 3/16" - 192 mm / 7 9/16" - 3/4" | ② Cond. water in.: 563 mm / 22 3/16" - 125 mm / 4 15/16" - 12 mm / 8/16" |
| ③ Water out.: 528 mm / 20 13/16" - 65 mm / 2 9/16" - 24 mm / 15/16" | ④ Electrical connections: 532 mm / 20 15/16" - 262 mm / 10 5/16" |
| ⑤ Cond. water out.: 573 mm / 22 9/16" - 65 mm / 2 6/16" - 12 mm / 8/16" | ⑥ Remote connections.: 574 mm / 22 10/16" - 262 mm / 10 5/16" |
| ⑦ Connection to DRB 500: 608 mm / 24 15/16" - 262 mm / 10 5/16" | ⑧ Connection to feed pump: 515 mm / 20 5/16" - 159 mm / 10 5/16" |
- ②③ Only for water cooling systems

► Technical information

Production in 24h	1500 kg / 3307 lbs	Sizes (L-P-H mm)	1107 - 700 - 970
Cooling system	A - W	(L-P-H in)	43 9/16 - 27 9/16 - 38 3/16
Refrigerant	R404A	Sizes with pack (L-P-H mm)	1210 - 800 - 1185
Standard voltage	400-415 V ~ 3N 50 Hz	(L-P-H in)	47 10/16 - 31 8/16 - 46 10/16
Electrical consumption	6000 W	Net weight	306 kg / 675 lbs
Fuse	32 A	Gross weight	342 kg / 754 lbs
Water consumption	A: 1 l/kg - 12,0 gal/100 lbs	Finish	AISI 304 stainless steel, scotch brite
	W: 7 l/kg - 83,9 gal/100 lbs		

All the technical information need to be considered at the following conditions:
Ambient temperature +21° C
Water temperature +15° C
Electrical consumption at +21° C (standard voltage)

Models and specifications are subject to change without notice

Muster 2000

Modular ice maker up to 2450 kg - Scale system

[illegible]

► Features & Plus

- Sub-cooled scale ice 99% dry
- 1l (water) - 1 kg (ice) - only Air cooled
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Specific volume 1 m³ = 430 kg of ice
- Vertical fixed “no leak” evaporator
- AISI 304 SS evaporator
- Removable and cleanable air filter
- Cleanable antiscale filter
- FDA approved - ABS plastic components
- Easy cleanable internal rounded surfaces
- RoHS Free
- Electromechanical operation
- Automatic water charge
- Standard and special voltages
- Frame in INOX



Vertical fixed “no leak”
evaporator



Removable and
cleanable air filter



Cleanable antiscale filter



Frame in INOX


► Prod. 24h

Air temp.		Water temp.		Kg	Lbs
10° C	50° F	10° C	50° F	2450	5401
21° C	70° F	15° C	60° F	2300	5071

► **Certifications available for this model**



Modular ice maker up to 2450 kg - Scale system

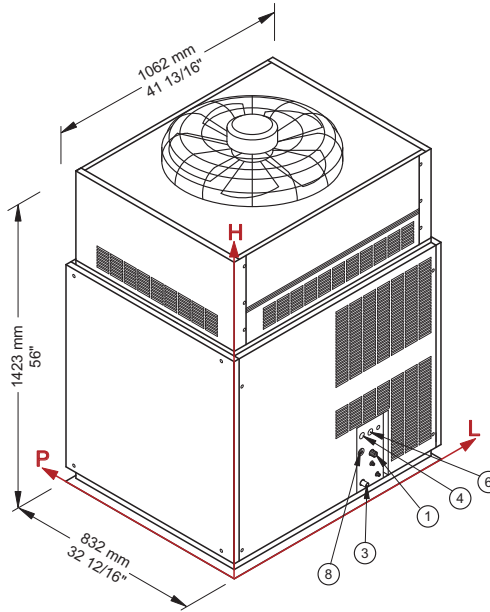

► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

		Water temperature					
		10° C	50° F	15° C	60° F	21° C	70° F
Air temperature	10° C	2450 kg					
	50° F		5401 lbs				
	21° C			2300 kg			
	70° F				5071 lbs		
	32° C					2034 kg	
	90° F						4484 lbs

► Connections

All measures are referred to the down-left corner (L-H-Ø)

- ① Water in.: 684 mm / 26 15/16" - 192 mm / 7 9/16" - 3/4"
 ④ Electrical connections: 651 mm / 25 10/16" - 271 mm / 10 11/16"
 ⑧ Connection to feed pump: 640 mm / 25 3/16" - 232 mm / 9 2/16"

- ③ Water out.: 659 mm / 25 15/16" - 65 mm / 2 9/16" - 24 mm / 15/16"

► Technical information

Production in 24h	2300 kg / 5071 lbs
Cooling system	A
Refrigerant	R404A
Standard voltage	400-415 V ~ 3N 50 Hz
Electrical consumption	7000 W
Fuse	32 A
Water consumption	A: 1 l/kg - 12,0 gal/100 lbs

Sizes (L-P-H mm)	1062 - 832 - 1423
Sizes (L-P-H in)	41 13/16 - 32 12/16 - 56
Sizes with pack (L-P-H mm)	1150 - 960 - 1700
(L-P-H in)	45 4/16 - 37 13/16 - 66 15/16
Net weight	520 kg / 1146 lbs
Gross weight	570 kg / 1257 lbs
Finish	AISI 304 stainless steel, scotch brite

All the technical information need to be considered at the following conditions:
Ambient temperature +21° C
Water temperature +15° C
Electrical consumption at +21° C (standard voltage)

Models and specifications are subject to change without notice



Modular ice maker - Scale system Daily production up to 5300 kg

Hotel	
Restaurant	
Fast food	
Bar	
Disco	
Fish market	
Supermarket	
Medical & SPA	
Industry	

► Position n°

► Features & Plus

- Sub-cooled scale ice 99% dry
- 1l (water) - 1kg (ice) - only Air cooled
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Specific volume 1 m³ = 430 kg of ice
- Vertical fixed "no leak" evaporator
- AISI 316L SS evaporator
- Removable and cleanable air filter
- Cleanable antiscaling filter
- FDA approved - ABS plastic components
- Easy cleanable internal rounded surfaces
- RoHS Free
- Electromechanical operation
- Automatic water charge
- Frame in INOX



Vertical fixed "no leak" evaporator



Cleanable antiscaling filter



Frame in INOX

► Prod. 24h

	Air temp.		Water temp.		Kg	Lbs
	10° C	50° F	7° C	45° F	5300	11684
	21° C	70° F	15° C	60° F	5000	11023

2 Years Warranty
subject to limitations

► Certifications available for this model






Ice Scales

Muster 5000



Modular ice maker - Scale system Daily production up to 5300 kg

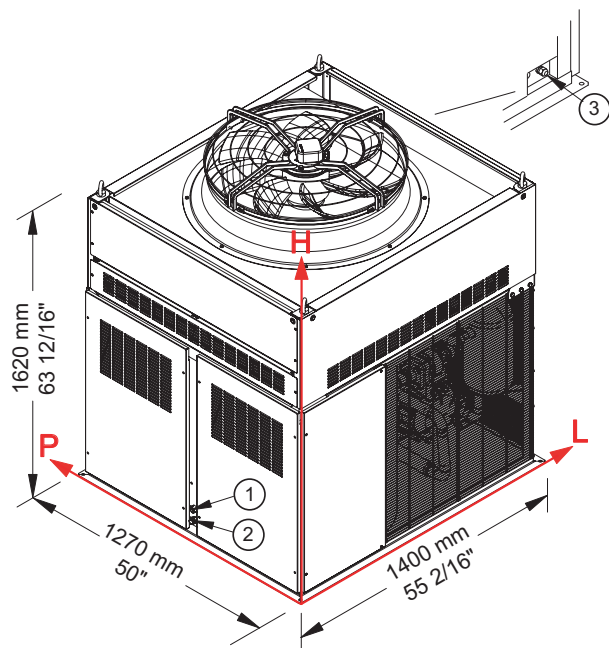

► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	5300 kg					
	50° F		11684 lbs				
	21° C			5000 kg			
	70° F				11023 lbs		
	32° C					4400 kg	
	90° F						9700 lbs

► Connections

All measures are referred to the down-left corner (L-H-Ø)

- ① Water in.: 635 mm / 25" - 135 mm / 5 5/16" - 3/4"
- ② Water out.: 635 mm / 25" - 80 mm / 3 2/16" - 24 mm / 15/16"
- ③ Electrical connections: 1132,5 mm / 44 9/16" - 88,5 mm / 3 8/16"

► Technical information

Production in 24h	5000 kg / 11023 lbs
Cooling system	A
Refrigerant	R404A - R452A
Standard voltage	400-415 V ~ 3N 50 Hz
Electrical consumption	16000 W
Water consumption	A: 1 l/kg - 12,0 gal/100 lbs

Sizes (L-P-H mm)	1270 - 1400 - 1620
(L-P-H in)	50 - 55 2/16 - 63 12/16
Sizes with pack (L-P-H mm)	1390 - 1524 - 1960
(L-P-H in)	54 7/8 - 60 - 77 3/16
Net weight	1000 kg / 2205 lbs
Gross weight	1130 kg / 2491 lbs
Finish	AISI 304 stainless steel, scotch brite

The appliance must be connected to an interlocked socket 125A or automatic thermomagnetic circuit-breaker device 63A

All the technical information need to be considered at the following conditions:
Ambient temperature +21° C
Water temperature +15° C
Average power consumption at +21° C (standard voltage)

Models and specifications are subject to change without notice



По вопросам продаж и поддержки обращайтесь: bme@nt-rt.ru www.brema.nt-rt.ru

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62

Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64

Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Россия (495)268-04-70

Киргизия (996)312-96-26-47

Казахстан (7172)727-132